



图形符号/SYMBOL:



技术参数/TECHNICAL DATA:

应用材料/MATERIAL EMPLOYED

阀体/BODY: 钢体/Steel

阀芯/VALVES: 硬质钢/Hardened Steel

适用工作环境/OPERATIONAL RANGE

安装/MOUNTING

按需/as preferred


温度/TEMPERATURES

理想工作温度: +40°C~+70°C/Ideal operating range between +40°C and +70°C

最高工作温度: +90°C/Max operating temperature +90°C

最低/最高环境温度: -20°C~+60°C/ Min/Max environment temps -20°C and +60°C

型号说明/MODEL CODE:




①材料/Material: SS: 不锈钢/Stainless steel 空白: 碳钢/Carbon steel

②单向阀系列代号/check valve series code: SY-RZ型/SY-RZ type

③连接螺纹尺寸/connection thread dimension: LR; SR; G螺纹, 进油口为LR, SR螺纹, 出油口为G螺纹/LR; SR; G thread, The oil inlet is LR, SR thread, the oil outlet is G thread.

外形尺寸/OVER DIMENSION:

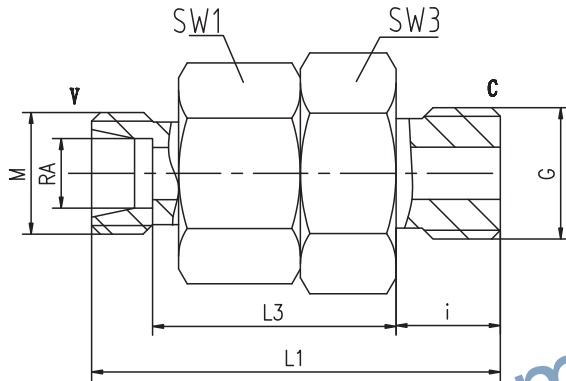

应用/APPLICATIONS:

压力作用下使得流体从V流向C, 而液体从C向V流动时则被反向密封, 油液无法通过/Under pressure so that the fluid flow from the V to C, and the flow from C to V and blocked in the reverse direction.

连接口略图	系列	型号	压力 (bar)	管径 (RA)	G	L1	L3	d	i	SW1	SW2	SW3	M
	轻系列L	SY-RZ-L06G1/8WD	315	6	G1/8	58	26.5	14	8	14	19	17	M12x1.5
		SY-RZ-L08G1/4WD		8	G1/4	60.5	28.5	19	12	17	24	22	M14x1.5
		SY-RZ-L10G1/4WD		10	G1/4	72	38.5	19	12	19	27	24	M16x1.5
		SY-RZ-L12G3/8WD		12	G3/8	74	40.5	22	12	22	32	27	M18x1.5
		SY-RZ-L15G1/2WD		15	G1/2	80.5	42.5	27	14	27	36	32	M22x1.5
		SY-RZ-L18G1/2WD	250	18	G1/2	87.5	48	27	14	32	41	38	M26x1.5
		SY-RZ-L22G3/4WD		22	G3/4	97	56	32	16	36	50	46	M30x2
		SY-RZ-L28G1WD		28	G1	108.5	64	40	18	41	60	55	M36x2
		SY-RZ-L35G1 1/4WD		35	G1 1/4	121	70	50	20	50	70	65	M45x2
		SY-RZ-L42G1 1/2WD		42	G1 1/2	122.5	70.5	55	22	60	70	65	M52x2
	重系列S	SY-RZ-S06G1/4WD	400	6	G1/4	63.5	31.5	19	12	17	19	17	M14x1.5
		SY-RZ-S08G1/4WD		8	G1/4	63.5	31.5	19	12	19	19	17	M16x1.5
		SY-RZ-S10G3/8WD		10	G3/8	71.5	38	22	12	22	24	22	M18x1.5
		SY-RZ-S12G3/8WD		12	G3/8	74.5	41	22	12	24	27	24	M20x1.5
		SY-RZ-S14G1/2WD	315	14	G1/2	83.5	43.5	27	14	27	32	27	M22x1.5
		SY-RZ-S16G1/2WD		16	G1/2	86.5	46	27	14	30	36	32	M24x1.5
		SY-RZ-S20G3/4WD		20	G3/4	97	50	32	16	36	41	38	M30x2
		SY-RZ-S25G1WD		25	G1	108	54.5	40	18	46	50	46	M36x2
		SY-RZ-S30G1 1/4WD	250	30	G1 1/4	121.5	64	50	20	50	60	55	M42x2
		SY-RZ-S38G1 1/2WD		38	G1 1/2	135.5	71.5	55	22	60	70	65	M52x2

说明: 开启压力为0.3Mpa/(NOTE: the pressure of opening is 0.3Mpa)